

Rec'd PTO



APR 2003



Pct/GB2003/004025

1530895



INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 20 OCT 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



*P. Mahoney*

Signed

Dated 8 October 2003

**Patents Form 1/77**

Patents Act 1977  
(Rule 16)

The  
**Patent  
Office**

**1/77**

**Request for grant of a patent**

*(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

THE PATENT OFFICE

H

12 OCT 2002

NEWPORT

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

1. Your reference

SMC 60552/GB/P1  
15 OCT 02 E755601-2 D02944  
P01/7700 0.00-0223819.4

2. Patent application number

*(The Patent Office will fill in this part)*

12 OCT 2002

0223819.4

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

Avecia Limited  
Hexagon House  
Blackley  
Manchester, M9 8ZS  
United Kingdom

Patents ADP number *(if you know it)*

07764137001 ✓

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

INKS

5. Name of your agent *(if you have one)*

MAYALL, John

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

Avecia Limited  
Hexagon House  
Blackley  
Manchester, M9 8ZS  
United Kingdom

06244313004

Patents ADP number *(if you know it)*

6244313002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number  
*(if you know it)*

Date of filing  
*(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

13 —

Claim(s)

02 —

Abstract

01 — 

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 11/10/02

Avecia Limited Authorised Signatory

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs K.M. Pinder/Miss G. Terry 0161 721 1361/2

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

SMC 60552

APPLICANTS

Avecia Limited

TITLE

INKS

INKS

This invention relates to inks, to printing processes, to printed substrates and to ink-jet printer cartridges.


Ink-jet printing (IJP) is a non-impact printing technique in which droplets of ink are ejected through a fine nozzle onto a substrate without bringing the nozzle into contact with the substrate.

There are many demanding performance requirements for inks used in IJP. For example they desirably provide sharp, non-feathered images having good water, light and ozone fastness with a good optical density. The inks are often required to dry quickly when applied to a substrate to prevent smudging, but they should not form a crust over the tip of an ink-jet nozzle because this will stop the printer from working. The inks should also be stable to storage over time without decomposing or forming a precipitate that could block the printers fine nozzle.

Inks where the colorant is a dye containing a single copper phthalocyanine group such as, for example, C.I. Direct Blue 199 and C.I. Direct Blue 86 are known. Inks comprising newer phthalocyanines are also known, for example as described in US 6,149,722. However, there is a continuing need to provide inks having superior properties in ink-jet printing.

A particular problem for photorealistic quality printing is that of permanence, that is the ability of the colourants used in producing a photographic print to retain their colour properties over a number of years. A key factor contributing to the poor permanence of prints is the quenching of printed colorants by atmospheric pollutants, such as ozone.


According to the present invention there is provided an ink comprising a compound of Formula (1) and salts thereof:

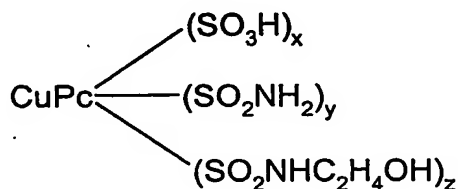

Formula (1)

wherein:

Pc represents a phthalocyanine nucleus of Formula (2);



Formula (2)

5           x is greater than 0 and less than 1.8;  
          y and z are both greater than 0; and  
          the sum of (x+y+z) is 2.4 to 4.5:  
          and a liquid medium.

10           Preferably x is greater than 0 and less than 1.5, more preferably x is greater than 0  
          and less than 1.2, especially x is greater than 0.05 and less than 1.0 and more especially  
          x is greater than 0.05 and less than 0.5.

          Preferably the sum of y + z is in the range of from 2.4 to 4.2, more preferably 2.7  
          to 4.1.

15           The sum of (x + y + z) is preferably 3.5 to 4.5, more preferably the sum of (x + y +  
          z) is 3.8 to 4.2.

          The values for x, y and z in compounds of Formula (1) all represent statistical  
          averages.

20           Acid or basic groups on the compounds of Formula (1), particularly acid groups,  
          are preferably in the form of a salt. Thus, the Formulae shown herein include the  
          compounds in free acid and in salt form.

25           Preferred salts are alkali metal salts, especially lithium, sodium and potassium,  
          ammonium and substituted ammonium salts (including quaternary amines such as  
          ((CH<sub>3</sub>)<sub>4</sub>N<sup>+</sup>) and mixtures thereof. Especially preferred are salts with sodium, lithium,  
          ammonia and volatile amines, more especially sodium salts. The compounds may be  
          converted into a salt using known techniques.

          The compounds of Formula (1) may exist in tautomeric forms other than those  
          shown in this specification. These tautomers are included within the scope of the present  
          invention.

30           The compounds of Formula (1) may be prepared by condensing copper  
          phthalocyanine carrying sulphonyl chloride groups and optionally sulphonic acid groups  
          with ammonia and ethanolamine. The condensation is preferably performed in water at a  
          pH above 7. Typically the condensation is performed at a temperature of 30 to 70°C and  
          the condensation is usually complete in less than 24 hours. Ammonia and ethanolamine  
          may be used as a mixture or condensed sequentially with the phthalocyanine.

Copper phthalocyanine carrying sulphonyl chloride groups and optionally sulphonic acid groups may be prepared by chlorosulphonating copper phthalocyanine, e.g. using chlorosulphonic acid and optionally a chlorinating agent (e.g.  $\text{POCl}_3$ ,  $\text{PCl}_5$  or thionylchloride).

5 Preferred liquid media include water, a mixture of water and organic solvent and organic solvent free from water.

When the medium comprises a mixture of water and organic solvent, the weight ratio of water to organic solvent is preferably from 99:1 to 1:99, more preferably from 99:1 to 50:50 and especially from 95:5 to 80:20.

10 It is preferred that the organic solvent present in the mixture of water and organic solvent is a water-miscible organic solvent or a mixture of such solvents. Preferred water-miscible organic solvents include  $\text{C}_{1-6}$ -alkanols, preferably methanol, ethanol, n-propanol, isopropanol, n-butanol, sec-butanol, tert-butanol, n-pentanol, cyclopentanol and cyclohexanol; linear amides, preferably dimethylformamide or dimethylacetamide; ketones  
15 and ketone-alcohols, preferably acetone, methyl ether ketone, cyclohexanone and diacetone alcohol; water-miscible ethers, preferably tetrahydrofuran and dioxane; diols, preferably diols having from 2 to 12 carbon atoms, for example pentane-1,5-diol, ethylene glycol, propylene glycol, butylene glycol, pentylene glycol, hexylene glycol and thiodiglycol and oligo- and poly-alkyleneglycols, preferably diethylene glycol, triethylene glycol, polyethylene glycol and polypropylene glycol; triols, preferably glycerol and  
20 1,2,6-hexanetriol; mono- $\text{C}_{1-4}$ -alkyl ethers of diols, preferably mono- $\text{C}_{1-4}$ -alkyl ethers of diols having 2 to 12 carbon atoms, especially 2-methoxyethanol, 2-(2-methoxyethoxy)ethanol, 2-(2-ethoxyethoxy)-ethanol, 2-[2-(2-methoxyethoxy)ethoxy]ethanol, 2-[2-(2-ethoxyethoxy)-ethoxy]-ethanol and ethyleneglycol monoallylether; cyclic amides, preferably 2-pyrrolidone,  
25 N-methyl-2-pyrrolidone, N-ethyl-2-pyrrolidone, caprolactam and 1,3-dimethylimidazolidone; cyclic esters, preferably caprolactone; sulphoxides, preferably dimethyl sulphoxide and sulpholane. Preferably the liquid medium comprises water and 2 or more, especially from 2 to 8, water-miscible organic solvents.

Especially preferred water-miscible organic solvents are cyclic amides, especially 2-  
30 pyrrolidone, N-methyl-pyrrolidone and N-ethyl-pyrrolidone; diols, especially 1,5-pentane diol, ethyleneglycol, thiodiglycol, diethyleneglycol and triethyleneglycol; and mono-  $\text{C}_{1-4}$ -alkyl and  $\text{C}_{1-4}$ -alkyl ethers of diols, more preferably mono-  $\text{C}_{1-4}$ -alkyl ethers of diols having 2 to 12 carbon atoms, especially 2-methoxy-2-ethoxy-2-ethoxyethanol.

Examples of further suitable liquid media comprising a mixture of water and one or  
35 more organic solvents are described in US 4,963,189, US 4,703,113, US 4,626,284 and EP 4,251,50A.

When the liquid medium comprises an organic solvent free from water, (i.e. less than 1% water by weight) the solvent preferably has a boiling point of from  $30^\circ$  to  $200^\circ\text{C}$ , more preferably of from  $40^\circ$  to  $150^\circ\text{C}$ , especially from  $50$  to  $125^\circ\text{C}$ . The organic solvent  
40 may be water-immiscible, water-miscible or a mixture of such solvents. Preferred water-

miscible organic solvents are any of the hereinbefore-described water-miscible organic solvents and mixtures thereof. Preferred water-immiscible solvents include, for example, aliphatic hydrocarbons; esters, preferably ethyl acetate; chlorinated hydrocarbons, preferably  $\text{CH}_2\text{Cl}_2$ ; and ethers, preferably diethyl ether; and mixtures thereof.

5 When the liquid medium comprises a water-immiscible organic solvent, preferably a polar solvent is included because this enhances solubility of the compound in the liquid medium. Examples of polar solvents include  $\text{C}_{1-4}$ -alcohols.

10 In view of the foregoing preferences it is especially preferred that where the liquid medium is an organic solvent free from water it comprises a ketone (especially methyl ethyl ketone) &/or an alcohol (especially a  $\text{C}_{1-4}$ -alkanol, more especially ethanol or propanol).

15 The organic solvent free from water may be a single organic solvent or a mixture of two or more organic solvents. It is preferred that when the medium is an organic solvent free from water it is a mixture of 2 to 5 different organic solvents. This allows a medium to be selected that gives good control over the drying characteristics and storage stability of the ink.

Liquid media comprising an organic solvent free from water are particularly useful where fast drying times are required and particularly when printing onto hydrophobic and non-absorbent substrates, for example plastics, metal and glass.

20 The liquid media may also contain additional components conventionally used in ink-jet printing inks, for example viscosity and surface tension modifiers, corrosion inhibitors, biocides, kogation reducing additives and surfactants which may be ionic or non-ionic.

25 Although not usually necessary, further colorants may be added to the ink to modify the shade and performance properties. Examples of such colorants include C.I. Direct Yellow 86, 132, 142 and 173; C.I. Direct Blue 199, and 307; C.I. Food Black 2; C.I. Direct Black 168 and 195; and C.I. Acid Yellow 23. Addition of such further dyes can increase overall solubility leading to less kogation (nozzle blockage) for the resultant ink.

Preferred inks comprise:

30 (a) from 0.01 to 30 parts of a compound of Formula (1); and

(b) from 70 to 99.99 parts of a liquid medium;

wherein all parts are by weight and the number of parts of (a)+(b)=100.

35 The number of parts of component (a) is preferably from 0.1 to 20, more preferably from 0.5 to 15, and especially from 1 to 5 parts. The number of parts of component (b) is preferably from 99.9 to 80, more preferably from 99.5 to 85, especially from 99 to 95 parts.

40 Preferably component (a) is completely dissolved in component (b). Preferably component (a) has a solubility in component (b) at  $20^\circ\text{C}$  of at least 10%. This allows the preparation of liquid ink concentrates that may be used to prepare more dilute inks and reduces the chance of the dyestuffs in the precipitating if evaporation of the liquid medium occurs during storage.



Inks of the present invention are preferably prepared using high purity ingredients and/or by purifying the ink after it has been prepared. Suitable purification techniques are well known, e.g. ultrafiltration, reverse osmosis, ion exchange and combinations thereof (either before or after they are incorporated in a ink according to the present invention).

5        Preferably the ink has a viscosity of less than 20 cP, more preferably less than 10 cP, especially less than 5 cP, at 25°C. Low viscosity inks are particularly well suited for application to substrates by means of ink-jet printers.

10        Preferably the ink contains less than 500ppm, more preferably less than 250ppm, especially less than 100ppm, more especially less than 10ppm in total of divalent and trivalent metal ions (other than any divalent and trivalent metal ions bound to a component of the ink).

15        Preferably the ink has been filtered through a filter having a mean pore size below 10 $\mu$ m, more preferably below 3 $\mu$ m, especially below 2 $\mu$ m, more especially below 1 $\mu$ m. This filtration removes particulate matter that could otherwise block the fine nozzles found in many ink-jet printers.

      Preferably the ink contains less than 500ppm, more preferably less than 250ppm, especially less than 100ppm, more especially less than 10ppm in total of halide ions.

20        The inks of the present invention display excellent storage stability and provide prints which have attractive, strong cyan shades. In particular prints formed using these inks display excellent light and ozone fastness. Furthermore the colorant used in the inks, that is compounds of Formula (1), may be prepared from cheap intermediates, avoiding the complexity and expense which is involved in manufacturing some of the more elaborate phthalocyanines.

25        A second aspect of the invention provides a process for forming an image on a substrate comprising applying ink according to the first aspect of the invention thereto by means of an ink-jet printer.

30        The ink-jet printer preferably applies the ink to the substrate in the form of droplets that are ejected through a small orifice onto the substrate. Preferred ink-jet printers are piezoelectric ink-jet printers and thermal ink-jet printers. In thermal ink-jet printers, programmed pulses of heat are applied to the ink in a reservoir by means of a resistor adjacent to the orifice, thereby causing the ink to be ejected from the orifice in the form of small droplets directed towards the substrate during relative movement between the substrate and the orifice. In piezoelectric ink-jet printers the oscillation of a small crystal causes ejection of the ink from the orifice. Alternately the ink can be ejected by an  
35        electromechanical actuator connected to a moveable paddle or plunger, for example as described in International Patent Application WO 00/48938 and International Patent Application WO 00/55089.

      The substrate is preferably paper, plastic, textile, metal or glass, more preferably paper, an overhead projector slide or a textile material, especially paper.

Preferred papers are plain, coated or treated papers which may have an acid, alkaline or neutral character.


A third aspect of the present invention provides paper, plastic, a textile, metal or glass, more preferably paper, an overhead projector slide or a textile material, especially paper more especially plain, coated or treated papers printed with ink according to the first aspect of the invention.

A fourth aspect of the present invention provides an ink-jet printer cartridge comprising a chamber and an ink wherein the ink is in the chamber and the ink is as defined in the first aspect of the present invention.

The invention is further illustrated by the following Examples in which all parts and percentages are by weight unless otherwise stated.


#### Example 1

Preparation of ink comprising the following dye wherein x is 0.8 and (y + z) is 3.2:



#### Stage 1

Preparation of:



Copper phthalocyanine (118.7g: molar ratio 1) was added in portions to a mixture of stirred chlorosulphonic acid (310 ml: molar ratio 23) and phosphorous oxychloride (37.8 ml: molar ratio 2) while keeping the temperature in the range of 50 to 60 °C. The mixture was heated gradually to 140 °C, and kept at that temperature, with stirring, for 3 hours. The reaction mixture was then poured onto a mixture of ice (3kg), water (1400ml) and sodium chloride (160g). The precipitate which formed was collected by filtration at reduced pressure and washed with 3% brine (500 ml) before being used in Stage 2.

#### Stage 2

Preparation of the title dye:

Water (2 litre), ethanolamine (24.6 g, molar ratio 2) and 35% ammonia solution (20g: molar ratio 2) were mixed in a 5 litre beaker and then placed in an ice bath (pH = 11.5, temperature 8° C). The phthalocyanine sulphonyl chloride paste (molar ratio 1),

resulting from stage 1 above, was slowly added to the mixture while the temperature was kept below 5° C and the pH was maintained at pH 8 by the addition of 10% v/v sodium hydroxide. The reaction mixture was left overnight at room temperature and then heated at 40°C for 4 hours. Sodium chloride (50% w/v) was added and the resultant precipitate was collected by filtration at reduced pressure and desalinated by dialysis to obtain the title dye wherein x is 0.8 and (y + z) is 3.2.

### Stage 3

#### Preparation of the ink:

An ink of the present invention was prepared by dissolving 3.5g of the dye prepared in stage 2 in 100 ml of a liquid medium consisting of 2-pyrrolidone/thiodiglycol/Sufynol™ 465 in a weight ratio of 5:5:1.

### Examples 2 to 9

#### Stage 1 and 2

Stage 1 and 2 of Example 1 was repeated except that the relative values of x, y and z in the dye in the ink were varied by changing the molar ratios of POCl<sub>3</sub>, ethanolamine and ammonia as shown in Table 1.

### Stage 3

Inks were prepared from the dyes prepared in stage 2 as described in stage 3 of Example 1

### Examples 10 to 16

#### Stage 1

The method of Example 1, stage 1, was repeated except that the molar ratio of POCl<sub>3</sub> used in each example was as shown in Table 1.

### Stage 2

Water (1 litre) and ethanolamine (12g, molar ratio 1) were mixed and then placed in an ice bath. The phthalocyanine sulphonyl chloride pastes (molar ratio 1), prepared as described in stage 1 were slowly added to the mixture while the temperature was kept below 5° C and the pH was maintained at pH 8 by the addition of 10% v/v. ammonia solution. The reaction mixture was left overnight at room temperature and then heated at 40°C for 4 hours. Sodium chloride (20% w/v) was added and the resultant precipitate was collected by filtration at reduced pressure and desalinated by dialysis to obtain the phthalocyanine dyes described in Examples 10 to 16 of Table 1 below.

### Stage 3

Inks were prepared from the dyes prepared in stage 2 as described in stage 3 of Example 1

Table 1

Dye in Example	POCl <sub>3</sub> (molar ratio)	Ethanolamine (molar ratio)	Ammonia (molar ratio)	x	y + z
2	2	4	2	0.1	4.0
3	2	6	2	0.1	4.0
4	2	2	4	1.1	3.0
5	2	2	6	1.0	3.0
6	2.5	2	4	0.4	3.4
7	2.5	4	2	0.2	3.6
8	2.5	2	6	0.2	3.4
9	2.5	2	2	0.6	3.2
10	1.5	1	AR	1.3	2.8
11	2	1	AR	0.8	3.2
12	2.5	1	AR	1.4	2.6
13	3	1	AR	0.8	3.2
14	3.5	1	AR	0.4	3.6
15	3.8	1	AR	0.4	3.8
16	1	1	AR	0.7	3.4


5 AR – as required to adjust the pH is step (b) to pH 8.0.

#### Comparative Example

##### Stage 1

##### Preparation of the comparative phthalocyanine dye:

10 The phthalocyanine dye wherein x is 2, y is 1 and z is 1:



15 was prepared as described in Example 1 of US 6,149,722 which preparation is incorporated herein by reference.

##### Stage 2

##### Preparation of the comparative ink:

20 The compound prepared in stage 1 (3.5g) was dissolved in 100 ml of a liquid medium consisting of 2-pyrrolidone/thiodiglycol/Sufynol™ 465 in a weight ratio of 5:5:1.

**Example 34****Ozone Fastness**

The Example Inks 1 to 16 and the Comparative Ink were printed onto a variety of papers using a Canon 5800™ IJ printer. The printed substrate was then assessed for ozone stability using an ozone test cabinet from Hampden Test Equipment. The test was carried out for twenty four hours at 40°C and 50% relative humidity in the presence of 1 part per million of ozone. Fastness of the printed ink to ozone was judged by the difference in the optical density before and after exposure to ozone using a Gretag MacBeth Spectrolino. Thus, the lower the %OD loss the greater the ozone fastness. Results are shown below in Table 2 and these clearly demonstrate that inks based on compounds of this invention display good ozone fastness.

**Table 2**

<b>Example Ink</b>	<b>Substrate</b>	<b>% OD loss</b>
Ink 1	HP Premium Plus	2
Ink 1	Canon PR101	48
Ink 1	SEC Premium Photo	53
Ink 2	HP Premium Plus	0
Ink 2	Canon PR101	27
Ink 2	SEC Premium Photo	21
Ink 3	HP Premium Plus	0
Ink 3	Canon PR101	27
Ink 3	SEC Premium Photo	12
Ink 4	HP Premium Plus	2
Ink 4	Canon PR101	53
Ink 4	SEC Premium Photo	54
Ink 5	HP Premium Plus	3
Ink 5	Canon PR101	52
Ink 5	SEC Premium Photo	45
Ink 6	HP Premium Plus	2
Ink 6	Canon PR101	39
Ink 6	SEC Premium Photo	38
Ink 7	HP Premium Plus	3
Ink 7	Canon PR101	30
Ink 7	SEC Premium Photo	28
Ink 8	HP Premium Plus	2
Ink 8	Canon PR101	33
Ink 8	SEC Premium Photo	33

Ink 9	HP Premium Plus	-1
Ink 9	Canon PR101	41
Ink 9	SEC Premium Photo	41
Ink 10	HP Premium Plus	2
Ink 10	Canon PR101	43
Ink 10	SEC Premium Photo	45
Ink 11	HP Premium Plus	1
Ink 11	Canon PR101	37
Ink 11	SEC Premium Photo	39
Ink 12	HP Premium Plus	4
Ink 12	Canon PR101	55
Ink 12	SEC Premium Photo	56
Ink 13	HP Premium Plus	3
Ink 13	Canon PR101	23
Ink 13	SEC Premium Photo	19
Ink 14	HP Premium Plus	0
Ink 14	Canon PR101	17
Ink 14	SEC Premium Photo	12
Ink 15	HP Premium Plus	1
Ink 15	Canon PR101	15
Ink 15	SEC Premium Photo	7
Ink 16	HP Premium Plus	2
Ink 16	Canon PR101	28
Ink 16	SEC Premium Photo	25
Comparative Ink	HP Premium Plus	4
Comparative Ink	Canon PR101	71
Comparative Ink	SEC Premium Photo	64

#### Further Inks

5 The inks described in Tables A and B may be prepared using the compounds made in Examples 1 to 16. Numbers quoted in the second column onwards refer to the number of parts of the relevant ingredient and all parts are by weight. The inks may be applied to paper by thermal or piezo ink-jet printing.

The following abbreviations are used in Table A and B:

PG = propylene glycol

DEG = diethylene glycol

10 NMP = N-methyl pyrrolidone

DMK = dimethylketone

IPA = isopropanol

MEOH = methanol

2P = 2-pyrrolidone

MIBK = methylisobutyl ketone

P12 = propane-1,2-diol

5

BDL = butane-2,3-diol

CET = cetyl ammonium bromide

PHO =  $\text{Na}_2\text{HPO}_4$  and

TBT = tertiary butanol

TDG = thiodiglycol

10

TABLE A

Dye of Example	Dye Content	Water	PG	DEG	NMP	DMK	NaOH	Na Stearate	IPA	MEOH	2P	MIBK
1	2.0	80	5		6	4					5	
2	3.0	90		5	5		0.2			5	1	
3	10.0	85	3		3							1
4	2.1	91		8				0.2	4			5
5	3.1	86	5				0.5	0.5	6	10	9	4
6	1.1	81			9				10		5	
7	2.5	60	4	15	3	3						
8	5	65		20		5				6		5
9	2.4	75	5	4				0.3				
10	4.1	80	3	5	2	10			5	4	6	5
11	3.2	65		5	4	6				4		
12	5.1	96							5			
13	10.8	90	5						1		4	
14	10.0	80	2	6	2	5					15	
15	1.8	80		5							5	
16	2.6	84			11					2		6
14	3.3	80	2			10			3			
15	12.0	90				7	0.3				3	3
14	5.4	69	2	20	2	1					5	
15	6.0	91			4							

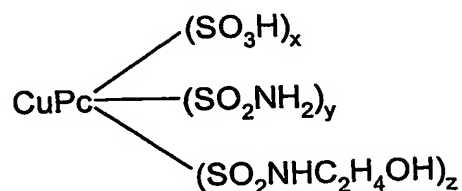


TABLE B

Dye of Example	Dye Content	Water	PG	DEG	NMP	CET	TBT	TDG	BDL	PHO	2P	PI2
1	3.0	80	15			0.2					5	
2	9.0	90		5						1.2		5
3	1.5	85	5	5		0.15	5.0	0.2				
4	2.5	90		6	4					0.12		
5	3.1	82	4	8		0.3						6
6	0.9	85		10					5	0.2		
7	8.0	90		5	5			0.3				
8	4.0	70		10	4				1		4	11
9	2.2	75	4	10	3				2		6	
10	10.0	91			6						3	
11	9.0	76		9	7		3.0			0.95	5	
12	5.0	78	5	11							6	
13	5.4	86			7						7	
14	2.1	70	5	5	5	0.1	0.2	0.1	5	0.1	5	
15	2.0	90		10								
16	2	88						10				
14	5	78			5			12			5	
15	8	70	2		8			15			5	
14	10	80						8			12	
15	10	80		10								

CLAIMS


1. An ink comprising a compound of Formula (1) and salts thereof:



Formula (1)

wherein:

Pc represents a phthalocyanine nucleus of Formula (2);



Formula (2)


x is greater than 0 and less than 1.8;  
y and z are both greater than 0; and  
the sum of (x+y+z) is 2.4 to 4.5;  
and a liquid medium.

2. An ink according to claim 1 wherein x is greater than 0 and less than 1.5.
3. An ink according to either claim 1 or claim 2 wherein x is greater than 0 and less than 1.2.
4. An ink according to any one of the preceding claims wherein x is greater than 0.05 and less than 1.0.
5. An ink according to any one of the preceding claims wherein x is greater than 0.05 and less than 0.5.
6. An ink according to any one of the preceding claims wherein y + z is in the range of from 2.4 to 4.2.

7. An ink according to any one of the preceding claims wherein  $y + z$  is in the range of from 2.7 to 4.1.
8. A process for forming an image on a substrate comprising applying an ink,  
5 according to any one of claims 1 to 7, thereto by means of an ink-jet printer.
9. A paper, plastic, textile, metal or glass material printed with an ink according to any one of claims 1 to 7.
10. An ink-jet printer cartridge comprising a chamber and an ink wherein the ink is in the chamber and the ink is as defined in any one of claims 1 to 7.

ABSTRACT


An ink comprising a compound of Formula (1) and salts thereof:

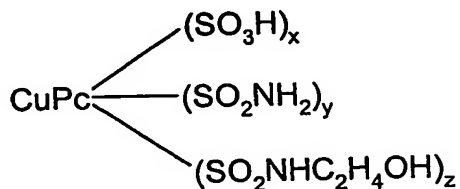

Formula (1)

wherein:

Pc represents a phthalocyanine nucleus of Formula (2);



Formula (2)

x is greater than 0 and less than 1.8;

y and z are both greater than 0; and

the sum of (x+y+z) is 2.4 to 4.5;

and a liquid medium.

Also an ink-jet printing process, a material printed with an ink of the invention and an ink jet printing cartridge containing an ink of the invention.

PCT Application

**GB0304023**

